


2022 Updated Huawei H13-231-ENU Dumps PDF - Want To Pass H13-231-ENU Fast [Q168-Q188]

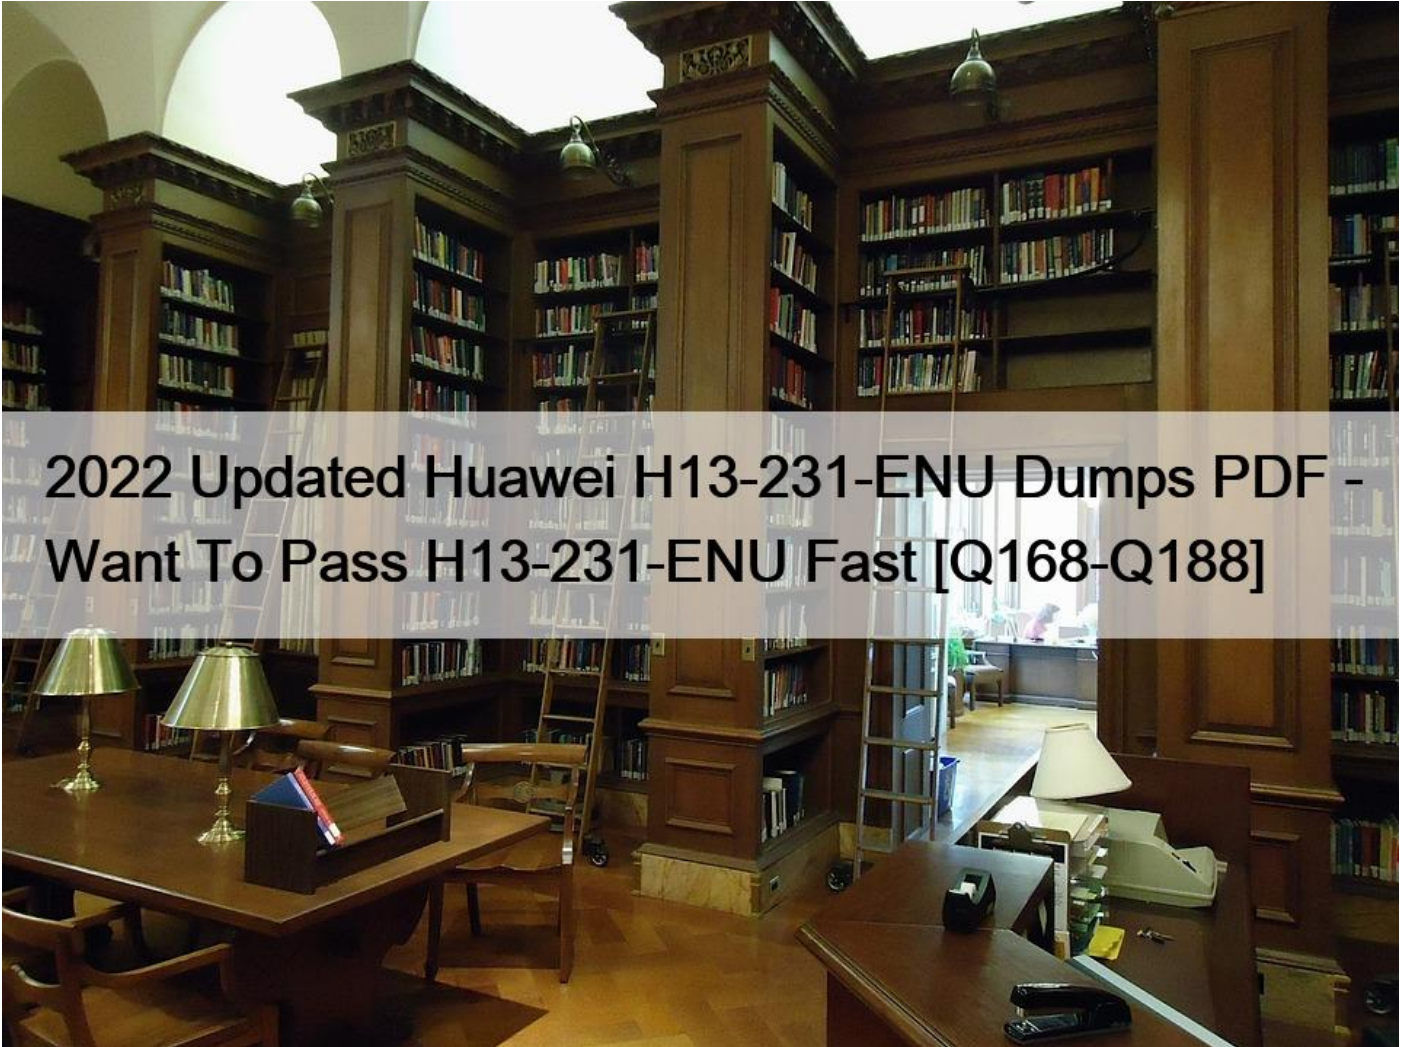

2022 Updated Huawei H13-231-ENU Dumps PDF - Want To Pass H13-231-ENU Fast [Q168-Q188]

2022 Updated Huawei H13-231-ENU Dumps PDF - Want To Pass H13-231-ENU Fast H13-231-ENU Practice Exam Dumps - 99% Marks In Huawei Exam NO.168 What is customer-oriented logical level software, such as ERP, CRM, HR, etc.?

- * Application software
- * Database software
- * Business application layer software
- * Middleware

NO.169 Use iostat to view the overall CPU usage statistics of a server and find that the value of `%iostat` is too high, which indicates that the hard disk has an IO bottleneck

- * True
- * False

NO.170 Which of the following understanding of the LVS-Tomcat cluster model is correct? (Multiple choice)

- * LVS-TUN: IP Tunneling, in the original request IP packets to add a new IP header.

- * Like this kind of load balancing and scheduling technology implemented in the Linux kernel, we call it Linux Virtual Server (LVS)
- * LVS-NAT: Network Address NetworkAddressTranslation, modify the request packet destination IP
- * LVS-DT: DirectRouting, manipulate new MAC addresses.

NO.171 Which of the following options does not belong to the IO performance index?

- * Amount of context switching.
- * Average waiting time
- * IO waiting
- * Average queue length

NO.172 RAID6 uses two-dimensional check, supports horizontal check and diagonal check, so at least N+2 disks are required.

- * True
- * False

NO.173 Huawei Atlas800 AI all-in-one machine deep learning platform provides enterprises with a one-stop AI enabling solution. Which of the following products can generally be used for deployment of this system? (Multiple choice)

- * Control node: Fusionserver Pro 1288H V5
- * Computing node: Atlas G2500
- * Control node: Fusionserver Pro2288H V5
- * Computing node: Atlas G5500

NO.174 An Internet company wants to migrate an assembly language software under Linux from the original X86 platform to the new Kunpeng platform. Which statement is correct? (Multiple choice)

- * Kunpeng platform does not support so it cannot be transplanted
- * It has nothing to do with the chip instruction set, no modification is required
- * Consider rewriting the ARM assembly code, and then gcc compile and run
- * Consider rewriting to C and then compiling and running with gcc.

NO.175 Intelligent Platform Management Interface (IPMI) is an open standard hardware management interface specification, which defines the specific method for the management subsystem to communicate?

- * Combined
- * Embedded
- * Tiled
- * Access

NO.176 Which of the following statement about the CISC instruction set is wrong?

- * About 20% of the instructions in the CISC command system account for 80% of the processing time
- * The instruction system is huge, with many instruction formats and addressing modes
- * Both the CISC instruction set and the RISC instruction set are von Neumann structures.
- * CISC microprocessor has a complex structure, powerful functions, and easy realization of special functions.

NO.177 Server hardware mainly includes, CPU, motherboard, memory, hard disk, PCIe, chassis, power supply, fan, etc. For Huawei RH2288 V5, all components that support hot swap are CPU, memory, PCIe expansion card.

- * True
- * False

NO.178 Memory Large pages use larger paging space, which can effectively reduce page table entries and support memory swapping.

- * True

* False

NO.179 What are the types of optical fiber connected optical modules according to the packaging form? (Multiple choice)

- * SFP
- * SFP+
- * SFP28

NO.180 Among the following chips, which semi-custom chip not only solves the shortcomings of custom circuits, but also overcomes the limited number of gate circuits of the original programming device?

- * CPU
- * GPU
- * FPGA
- * ASIC

NO.181 When engineer A wants to know the current server CPU load when maintaining EulerOS, which of the following commands can be used? (Multiple choice)

- * iostat
- * sar
- * uptime
- * top

NO.182 The logo of a certain memory module displays the words "PC3L", what does the "L" in "PC3L" mean?

- * The memory module type is UDIMM
- * Its rated power is 30W
- * Its rated voltage is 1.35V
- * The bit width of its memory particles is 64*3 bit.

NO.183 Linux is a collective term for a class of free-to-use and freely spread Unix-like computer operating systems. Which of the following is not an advantage of Linux?

- * The graphical interface makes meteorology easy to use for other systems, greatly reducing the learning cost of users.
- * Multiple users can own and use system resources at the same time, that is, each user has specific permissions on his own resources, and does not affect each other.
- * The Linux system is an open source system, relatively mature, with a complete set of permissions mechanism, and high security and stability
- * Linux has built-in a wealth of free network service software, database and web development tools.

NO.184 System sub-health detection and preprocessing refers to the recovery of data in advance by detecting the failure and health status of storage media and hardware, thereby ensuring performance and reliability. Which of the following can detect the health status?

- 1.Hard so failure slow disk, bad block Smart information, the UNC error
 - 2.Network card failure, speed reduction link packet loss, speed reduction, port failure, flash disconnection, packet loss
 - 3.server service control CPU resource exhaustion, CPU frequency decreases, memory failure ALLED CHOPPED CHING
 - 4.the SSD card failure, slow cards, bad blocks, temperature fault, capacitor failure, endurance than ethylene health threshold
- * 2,3,4
 - * 1,4

* 1,2,3,4

NO.185 Which of the following is wrong about engineer A's understanding of LVS load balancing technology?

- * The advantage of LVS/DR is that the server can run any operating system that supports TCP/IP, it only needs an IP address to be configured on the scheduler, and the server group can use private IP addresses.
- * LVS/NAT is the simplest way, so RealServer only needs to point its own gateway to Director, and Director can also be a RealServer
- * In the LVS/DR mode, the scheduler dynamically selects a server according to the load conditions of each server without modifying or encapsulating IP packets, but changing the MAC address of the data frame to the MAC address of the selected server.
- * In the LVS/DR mode, Director and RealServer must physically have a network card connected through an uninterrupted LAN.

NO.186 Which of the following applications does not belong to ASIC?

- * 2008 Beijing Olympics LED reel control system
- * AlphaGo system
- * CNN structure inference prediction
- * Atlas 500 Smart Station

NO.187 Which of the following is the correct understanding of the principle of high-availability clusters? (Multiple choice)

- * The high availability of a computing system is measured by the reliability and maintainability of the system.
- * High-availability clusters have two working modes, master-master working mode and master-slave working mode.
- * In a master-slave high-availability cluster, the standby server detects the operating status of the primary server through the heartbeat line. If it cannot detect the heartbeat of the primary server, it automatically takes over the resources of the primary server.
- * High-availability cluster refers to the use of the fault tolerance of the cluster system to provide 7X24 uninterrupted services to the outside world, aiming to provide highly reliable services.

NO.188 Which of the following is not classified according to the network card structure type?

- * Flexible card
- * MEZZ card
- * IB network card
- * Integrated network card

Updated Verified H13-231-ENU Q&As - Pass Guarantee: <https://www.actualtests4sure.com/H13-231-ENU-test-questions.html>