


## 2023 Correct and Up-to-date Huawei H12-811-ENU BrainDumps [Q227-Q242]

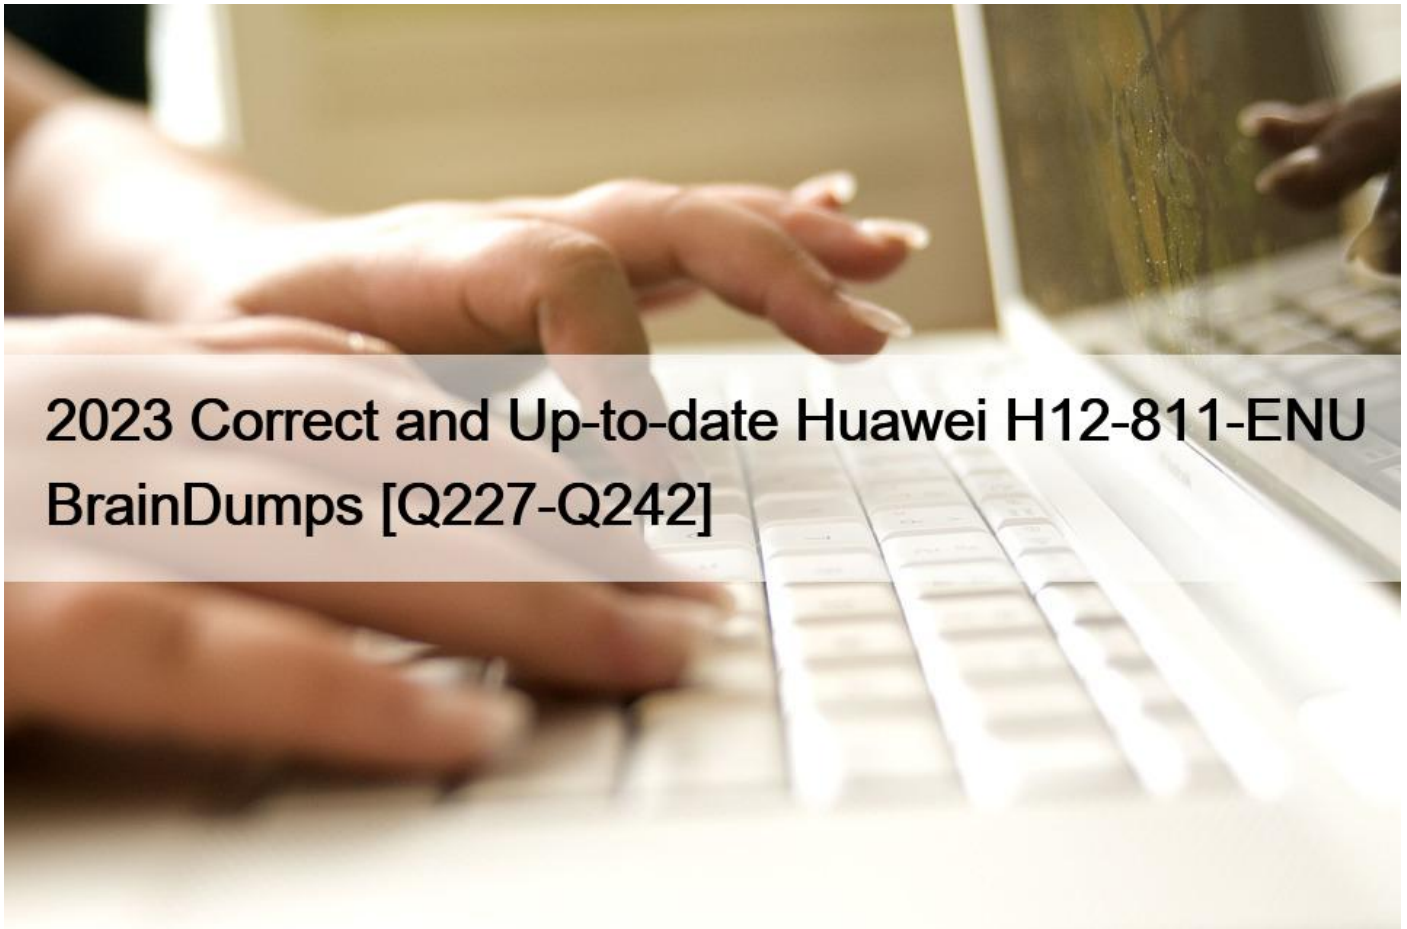

## 2023 Correct and Up-to-date Huawei H12-811-ENU BrainDumps [Q227-Q242]

### 2023 Correct and Up-to-date Huawei H12-811-ENU BrainDumps Current H12-811-ENU dumps Preparation through Our Practice Test NEW QUESTION 227

The network administrator uses Ping to test the connectivity of the network. Which of the following protocols may be used in this process? (Multiple choice)

- \* ICMP
- \* UDP
- \* TCP
- \* ARP

### NEW QUESTION 228

Which of the following packet types is used by RADIUS to indicate authentication rejection?

- \* Access-Accept
- \* Access-Request
- \* Access-Challenge
- \* Access-Reject

### NEW QUESTION 229

```
<huawei>system-view
```

```
[huawei]command-privilege level 3 view user save
```

The correct statement about the above configuration command is:

- \* Modify the user's authority level to 3, and save the configuration
- \* Modify the permission level of the user view command to 3, and save the configuration
- \* Modify the authority level of the save command used by a user to 3
- \* Modify the permission level of the save command in the user view to 3

### NEW QUESTION 230

The switch becomes a logical switch after stacking and clustering, and Eth-Trunk across physical devices can be deployed to improve network reliability.

- \* True
- \* False


### NEW QUESTION 231

If the broadcast address of a network is 172.16.1.255, then what may its network address be?

- \* 172.16.1.128
- \* 172.16.2.0
- \* 172.16.1.1
- \* 172.86.1.253

### NEW QUESTION 232

The priority of the LACP protocol is shown in the figure. Switch A and Switch B adopt LACP mode link aggregation, and all interfaces join the link aggregation group. At the same time, set the maximum number of active ports to 3. Which interface of switch A is not active port?

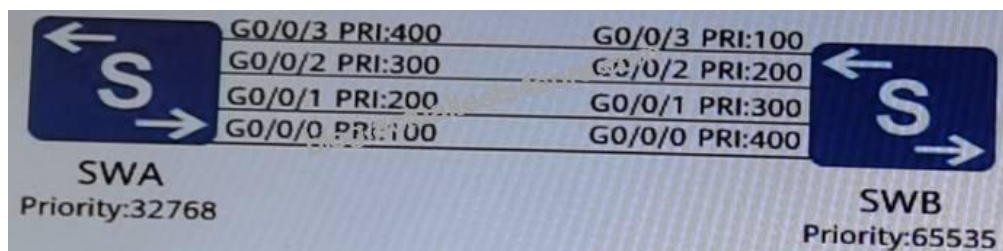

- \* G0/0/1
- \* G0/0/3
- \* G0/0/0
- \* G0/0/2

### NEW QUESTION 233

VRP supports OSPF multi-process. If the process number is not specified when OSPF is enabled, the process number used by default

- is ()
- \* 10
- \* 100
- \* 0
- \* 1

#### NEW QUESTION 234

The tracer diagnostic tool in Huawei routers is used to track the data forwarding path.

- \* TRUE
- \* False

#### NEW QUESTION 235

What command views exist in the VRP operating platform? (Multiple choice)

- \* User view
- \* Interface view
- \* Agreement view
- \* System view

#### NEW QUESTION 236

Which statement is wrong about the ARP message?

- \* ARP reply packets are sent unicast
- \* Any link layer protocol requires ARP messages to assist in obtaining data link layer identification
- \* ARP packets cannot be forwarded to other broadcast domains
- \* ARP request message is sent by broadcast

#### NEW QUESTION 237

When the Access type port sends a message, it will ().

- \* Send messages with tag
- \* Strip the VLAN information of the message, and then send it out
- \* Type the PVID information of this port, and then send it out
- \* Add the ZLAN message of the message, and then send it out

#### NEW QUESTION 238

The MAC address table of the existing switch is shown in the figure. Which of the following statements are correct?

```
<Huawei>display mac-address
MAC address table of slot 0:
-----
MAC Address      VLAN/      PEVLAN CEVLAN Port      Type      LSP/LSR-ID
                  VSI/SI
5489-9811-0b49 1          -          -          Eth0/0/3    static    -
-----
Total matching items on slot 0 displayed = 1
MAC address table of slot 0:
-----
MAC Address      VLAN/      PEVLAN CEVLAN Port      Type      LSP/LSR-ID
                  VSI/SI
5489-989d-1d30 1          -          -          Eth0/0/1    dynamic   0/-
5489-9885-18a8 1          -          -          Eth0/0/2    dynamic   0/-
-----
Total matching items on slot 0 displayed = 2
```

- \* When the switch restarts, the MAC address learned by port Eth0/0/2 does not need to be relearned
- \* When the switch restarts, the MAC address learned by port Eth0/0/3 needs to be learned again
- \* The data frame with the source MAC address of 5489-9811-0b49 and the destination MAC address of 5489-9894-1d30 received from the port is forwarded from the Eth0/0/2 port
- \* The data frame with the source MAC address of 5489-9885-18a8 and the destination MAC address of 5489-989d-1d30 received from the port is forwarded from the Eth0/0/1 port

### NEW QUESTION 239

If a Windows host is started for the first time, if the IP address is obtained by DHCP, then what is the source IP address of the first packet sent by this host?

- \* 127.0.0.1
- \* 169.254.2.33
- \* 0.0.0.0
- \* 255.255.255.255

### NEW QUESTION 240

The following two configuration commands can realize the router RTA to the same destination 10.1.1.0 routing master and backup backup.

? RTA ? ip route-static 10.1.1.0 24 12.1.1.1 permanent

? RTA ? ip route-static 10.2.2.0 24 13.1.1.1.

- \* True
- \* False

### NEW QUESTION 241

What is the first operation performed by the FIT AP after obtaining the AC's IP address?

- \* Upgrade software version
- \* Download the configuration file
- \* Establish CAPWAP tunnel
- \* Request configuration file

### NEW QUESTION 242

The administrator has configured the AR2200 as shown in the figure, then which of the following description of the configuration information is correct?

```
<Huawei>reset saved-configuration
Warning: The action will delete the saved configuration in the device.
The configuration will be erased to reconfigure. Continue? [Y/N]:
```

- \* The saved configuration file will be replaced by the running configuration file
- \* If the user wants to clear the next startup configuration file of the device configuration, then should select N
- \* If the user wants to clear the next startup configuration file of the device configuration, then should select Y
- \* The next startup file of the device configuration will be retained

**100% Reliable Microsoft H12-811-ENU Exam Dumps Test Pdf Exam Material:**  
<https://www.actualtests4sure.com/H12-811-ENU-test-questions.html>