


## [Apr-2022 SAP C\_CPE\_13 Test Engine PDF - All Free Dumps from Actualtests4sure [Q27-Q51]

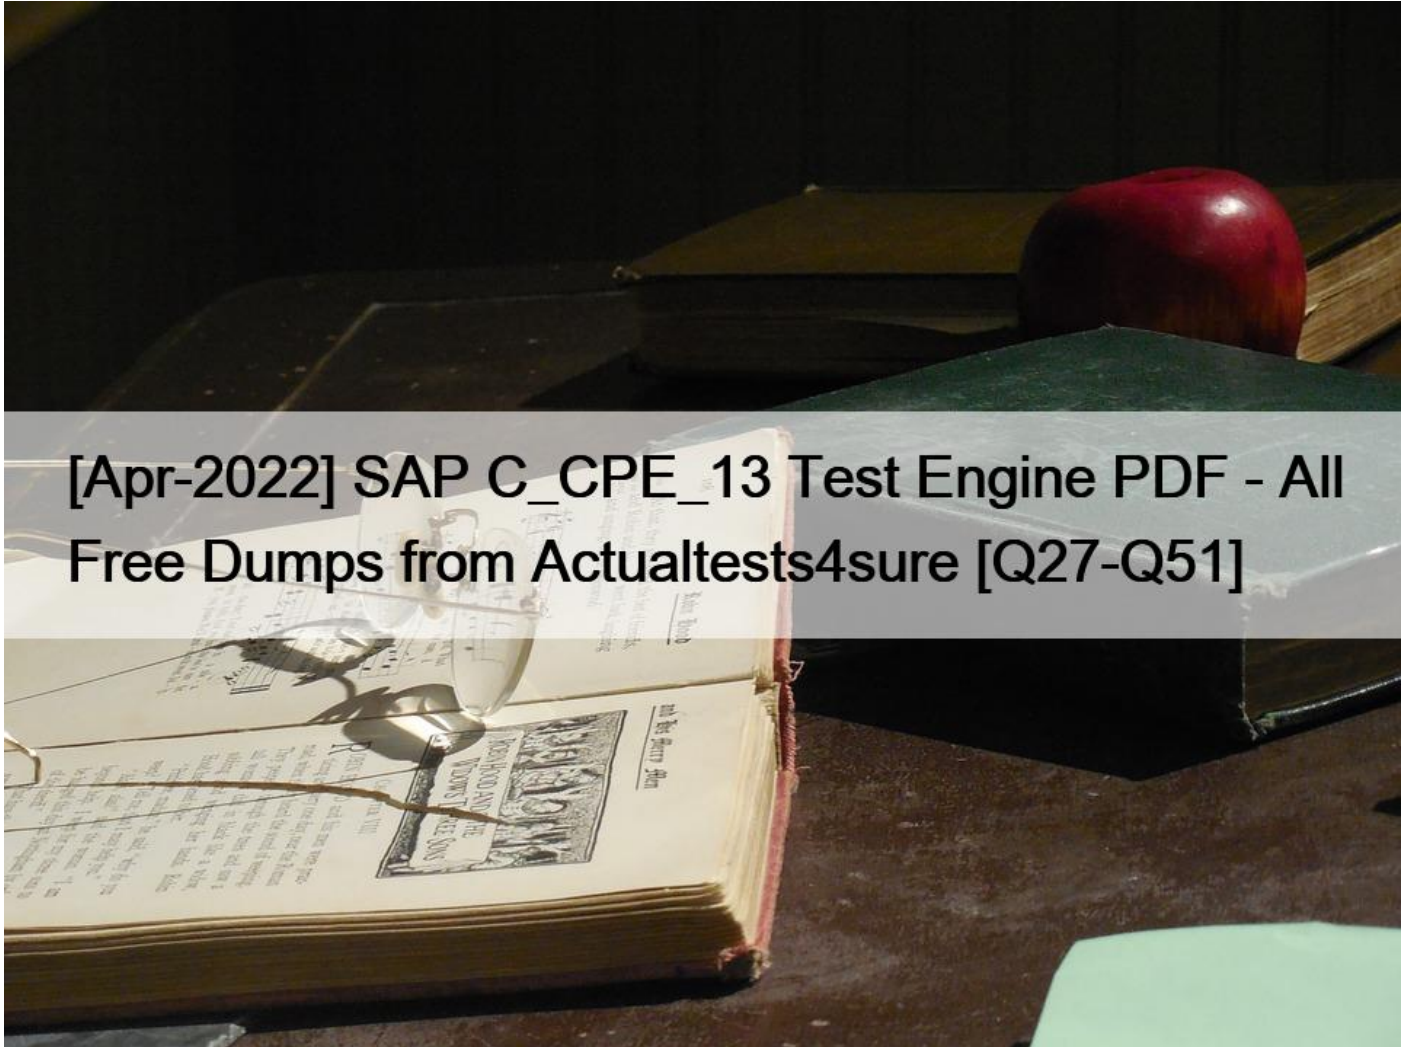

[Apr-2022] SAP C\_CPE\_13 Test Engine PDF - All Free Dumps from Actualtests4sure  
Get New C\_CPE\_13 Certification & Valid Exam Dumps Questions

### NEW QUESTION 27

You want to use the SAP Cloud Connector to connect an SAP S/4HANA system to the SAP BTP. Where does the SAP Cloud Connector need to be installed?

- \* In an SAP BTP subaccount
- \* In the on-premise network of the SAP S/4HANA system
- \* In a virtual machine independent from the on-premise network and the SAP BTP

### NEW QUESTION 28

You have created an SAP BTP subaccount and want to use Cloud Foundry. What is the correct order of next steps?

- \* Create quota plan. Enable Cloud Foundry. Create space. Create org
- \* Create quota plan. Create org. Create space. Enable Cloud Foundry
- \* Enable Cloud Foundry. Create space . Create org. Create quota plan
- \* Enable Cloud Foundry. Create org. Create space. Create quota plan

### NEW QUESTION 29

You have developed a CAP project and added the XSUAA security configuration. What information is stored in the xs-security.json file? Note: There are 2 to choose.

- \* roles
- \* users
- \* scopes
- \* role-templates

### NEW QUESTION 30

Which of the following are benefits of SAP Business Application Studio? Note: There are 3 to choose.

- \* Access to Visual Studio Code-compatible extensions
- \* Browser-based access
- \* Maintenance of all development projects in one central dev space
- \* Central administration
- \* Desktop client-based access

### NEW QUESTION 31

Which management tool can you use to deploy a CAP project into a space of your SAP BTP subaccount?

- \* Cloud Foundry command line interface
- \* APIs for SAP BTP
- \* SAP BTP command line interface

### NEW QUESTION 32

In SAP Fiori, how are drafts used? Note: There are 2 to choose.

- \* To prevent an object being edited by multiple users concurrently
- \* To enable empty states of apps
- \* To prevent data loss in case an app terminates unexpectedly
- \* To enable responsiveness of apps

### NEW QUESTION 33

Which severity level matches which request method?

A screenshot showing four SAP Fiori dropdown menus arranged in a 2x2 grid. Each menu has a blue header with a downward arrow and a list of numbers below. The top-left menu is labeled 'req.info' and contains the numbers 0, 5, 2, 4, 3. The top-right menu is labeled 'req.warn' and contains the numbers 0, 5, 2, 4, 3, 1. The bottom-left menu is labeled 'req.notify' and contains the numbers 0, 5, 2, 4, 3, 1. The bottom-right menu is labeled 'req.error' and contains the numbers 0, 5, 2, 4, 3, 1. A large, semi-transparent watermark 'actualtests4sure.cr' is overlaid diagonally across the entire image.

A screenshot showing the same four SAP Fiori dropdown menus as above. In this version, red boxes highlight specific options: the number '2' in the 'req.warn' menu, the number '3' in the 'req.notify' menu, and the number '4' in the 'req.error' menu. The watermark 'actualtests4sure.cr' is also present.

#### NEW QUESTION 34

Which of the following SAP Fiori pages areas are mandatory? Note: There are 2 to choose.

- \* Header
- \* Content
- \* Toolbars
- \* Footer

#### NEW QUESTION 35

Using a terminal in SAP Business Application Studio, you want to enable authentication support via XSUAA in CAP for SAP BTP. Which command must you run in the terminal?

- \* `npm i &#8211;save @sap/xssec @sap/xsenv`
- \* `cds compile srv &#8211;to xsuaa >@sap/xssec @sap/xsenv`
- \* `cds compile srv &#8211;to xsuaa >xs-security.json`
- \* `npm i &#8211;save xs-security.json`

#### NEW QUESTION 36

What is the standard health check time limit of a Cloud Foundry application?

- \* 60 seconds
- \* 30 seconds

- \* 180 seconds
- \* 90 seconds

### NEW QUESTION 37

You have configured an approuter by creating the xs-app.json file in the approuter folder with the following content: { "authenticationMethod": "route", "route": " ", "routes": [ { "source": "/app/(.\*)", "target": "\$1", "localDir": "resources", "authenticationType": "xsuaa" }, { "source": "/service/(.\*)", "destination": "srv-binding", "authenticationType": "xsuaa" } ] }

What does this routes array tell the approuter? Note: There are 2 correct answers to this question.

- \* The files in the resources folder will be served for all requests to /app.
- \* The files requested for /app will be put to the resources folder.
- \* All requests starting with /service will be forwarded to the CAP service.
- \* All requests starting with /service will be targeted to the folder resources.

### NEW QUESTION 38

Which dev space type in SAP Business Application Studio do you need when you want to create a CAP project?

- \* SAP Mobile Application
- \* Full Stack Cloud Application
- \* SAP Fiori
- \* Basic

### NEW QUESTION 39

At what level can you select a region?

- \* Directory
- \* Global account
- \* Subaccount
- \* Environment

### NEW QUESTION 40

You want to register custom event handlers using instances of CAP Node.js SDK classes. Which one do you use?

- \* cds.Request
- \* cds.Service
- \* cds.Event

### NEW QUESTION 41

You have implemented a simple bookshop CAP application for the purpose of selling books. You want to implement an event handler in the bookshop-service, that calculates a discount of 10 % on the price of books written in English (en). In all other cases, you want to calculate a discount of 5 %. The price should be calculated after books are read from the service. Drag the code snippets from below into the correct parts of the event handler implementation. Drag the key and value items from below into the correct parts of the descriptor file.

```
cds.serve( ) .with (function(){  
  this.( , 'books', (books)=>{  
    books.((book) =>{  
      if (  
    } else {  
    }  
  }  
});
```

```
'bookshop-service' book.price = book.price * 0.95
```

```
book.price = book.price * 0.9 forEach after 'READ' book.language == 'en'
```

```
cds.serve('bookshop-service') .with (function(){  
  this.after('READ', 'books', (books)=>{  
    books.forEach((book) =>{  
      if (book.language == 'en'  
        book.price = book.price * 0.95  
      } else {  
        book.price = book.price * 0.9  
      }  
    }  
  }  
});
```

```
'bookshop-service' book.price = book.price * 0.95
```

```
book.price = book.price * 0.9 forEach after 'READ' book.language == 'en'
```

#### NEW QUESTION 42

What are some characteristics of YAML files? Note: There are 2 to choose.

- \* YAML files can be used as configuration files.
- \* YAML files are based on XML.
- \* YAML files rely on correct indentation.
- \* YAML files are also valid JSON files.

#### NEW QUESTION 43

To establish trust, which of the following can be targets of the SAP Authorization and Trust Management Service?

- \* multi-environments
- \* identity-providers
- \* platforms

- \* users

#### NEW QUESTION 44

On SAP BTP, what request rate limit tries to protect the Cloud Foundry API against misuse?

- \* 10k requests per hour per user
- \* 1k requests per hour for all users
- \* 100k requests per hour per user
- \* 50k requests per hour for all users

#### NEW QUESTION 45

According to SAP CAP best practices, which error types should you NOT catch? Note: There are 2 to choose.

- \* Unexpected errors
- \* Runtime errors
- \* Programming errors
- \* Rejections of promises

#### NEW QUESTION 46

What are some characteristics of JSON files? Note: There are 2 to choose.

- \* JSON files contain human-readable data.
- \* JSON files are based on XML.
- \* JSON files are also valid YAML files.
- \* JSON files contain JavaScript commands.

#### NEW QUESTION 47

By default, which file describes scopes and role-templates of an application for the instantiation of an XSUAA service instance?

- \* xs-security.json
- \* package.json
- \* manifest.yml
- \* services-manifest.yml

#### NEW QUESTION 48

When deploying applications on SAP BTP, what is the maximum application package size?

- \* 2 GB
- \* 1 GB
- \* 2.5 GB
- \* 1.5 GB

#### NEW QUESTION 49

Your company is using the SAP Authorization and Trust Management service in conjunction with the XSUAA service to authorize their applications. Where do you bundle your defined scopes in role-templates?

- \* In an xs-security.json file
- \* In an instance of the XSUAA service
- \* In a role-collection

### NEW QUESTION 50

Which of the following dev space types contains the Java extension by default? Note: There are 2 to choose.

- \* SAP Fiori
- \* SAP HANA Native Application
- \* Full Stack Cloud Application
- \* SAP Mobile Application

### NEW QUESTION 51

Which of the following are capabilities of the SAP Cloud Connector? Note: There are 2 to choose.

- \* Providing control over cloud to on-premise connections
- \* Providing control over cloud to cloud connections
- \* Connect an SAP S/4HANA Cloud system with the SAP BTP
- \* Connecting an SAP S/4HANA system with the SAP BTP

**100% Passing Guarantee - Brilliant C\_CPE\_13 Exam Questions PDF:**

[https://www.actualtests4sure.com/C\\_CPE\\_13-test-questions.html](https://www.actualtests4sure.com/C_CPE_13-test-questions.html)]