


## UPDATED [Nov 23, 2022] Pass PowerProtect Cyber Recovery Exam Exam with Latest Questions [Q18-Q40]

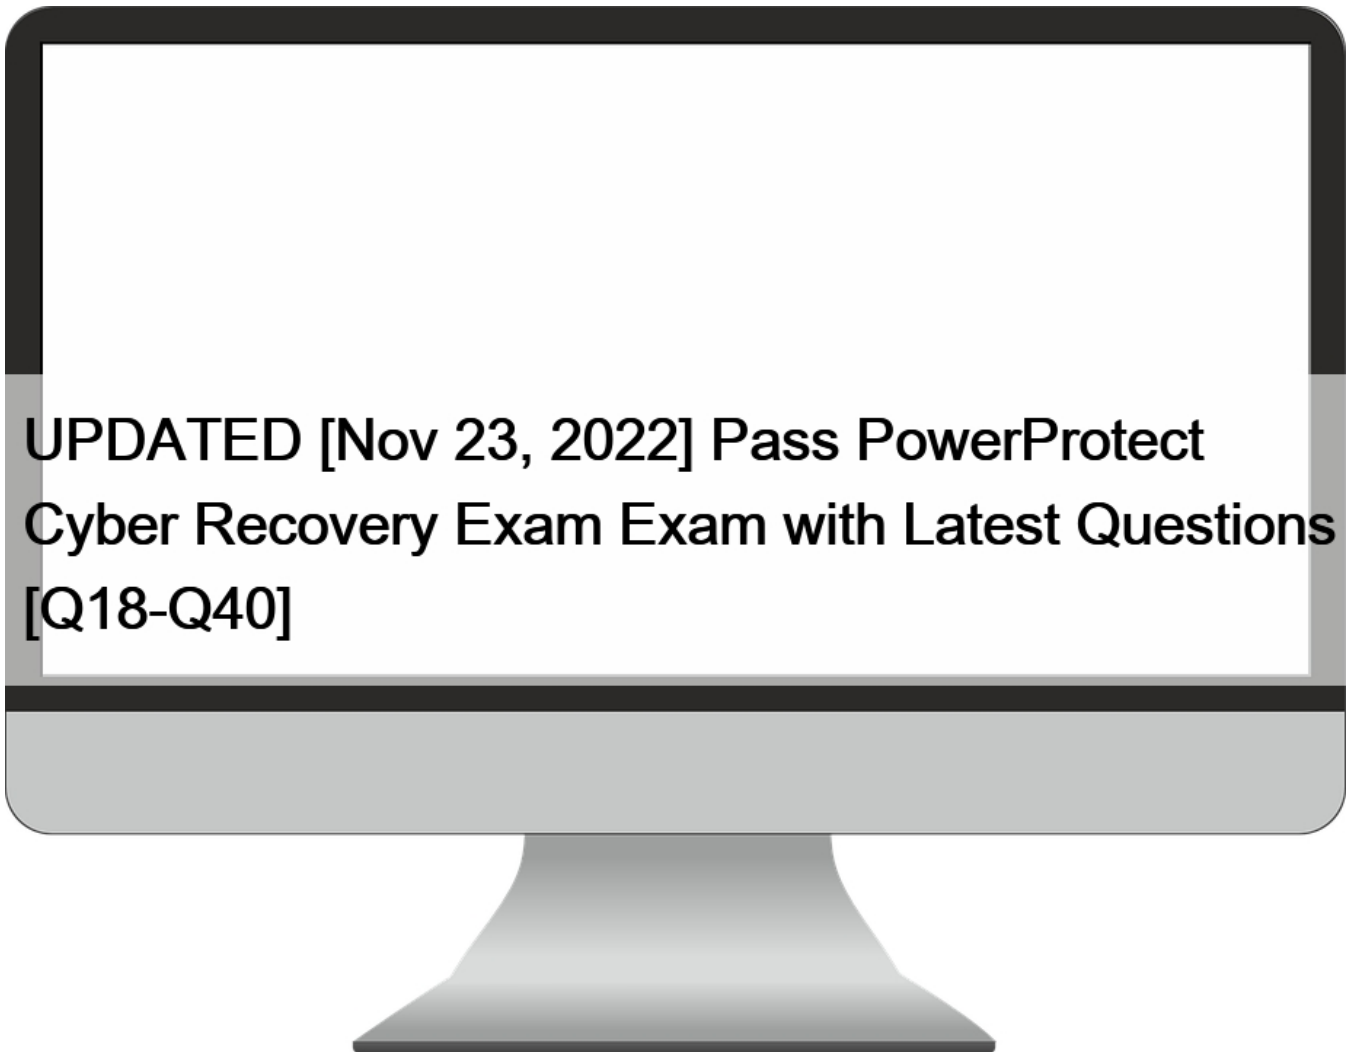

UPDATED [Nov 23, 2022] Pass PowerProtect Cyber Recovery Exam Exam with Latest Questions  
DEP-3CR1 Exam Practice Questions prepared by EMC Professionals

### Dell DEP-3CR1 Exam Cover Topics

PowerProtect Cyber Recovery Concepts (10%)PowerProtect Cyber Recovery Implementation (27%)PowerProtect Cyber Recovery Features (17%)PowerProtect Cyber Recovery Administration (20%)PowerProtect Cyber Recovery Design and Integration (26%)

**NO.18** Which component can add advanced analytics to Cyber Recovery?

- \* Dell EMC advanced analytics
- \* PowerProtect Data Manager analytics embedded tool
- \* NetWorker
- \* CyberSense

**NO.19** What enables and disables the air gap in cyber Recovery?

- \* Backup application admin
- \* Cyber Recovery software
- \* PowerProtect DD admin
- \* Cyber Recovery policies

**NO.20** A customer environment has PowerProtect Data Manager with the Cyber Recovery Solution. They want to perform a recovery test for the PowerProtect Data Manager data.

What options can be used to initiate the recovery session?

- \* Cyber Recovery UI or PowerProtect Data Manager UI
- \* CRCLI or PowerProtect Data Manager UI
- \* Cyber Recovery UI or CRCLI
- \* PowerProtect Data Manager CLI or Cyber Recovery UI

**NO.21** What is a prerequisite for Avamar backups to be restored in the vault?

- \* Avamar security user must be created
- \* Avamar must be configured to replicate to the PowerProtect DD
- \* Avamar checkpoint on the PowerProtect DD must be enabled
- \* Avamar hardening must be enabled

**NO.22** Which script verifies that the system is ready for a CyberSense docker installation?

- \* CheckEngine.sh
- \* yum install docker-ce
- \* crsetup.sh &#8211;check
- \* repobundle-ie-docker-check

**NO.23** Why is the AWS User Canonical ID needed when emailing CyberRecoveryCloudRequest@Dell.com?

- \* For access to the Cloud Formation template
- \* To assign the sales order number to your account
- \* To determine the AWS region to deploy Cyber Recovery
- \* For access to the Cyber Recovery AMI

**NO.24** A Cyber Recovery Administrator encounters a PowerProtect DD system that is offline and unavailable in the CR system.

What are the steps to remove this asset?

- \* From the CLI, look for the asset's UID, and run the command: crcli apps delete &#8211;uid
- \* From the Cyber Recovery UI, select Asset, select the unavailable tab, then delete
- \* From the CLI, look for the asset's nickname, and run the command: crcli dd delete -nickname
- \* From the Cyber Recovery UI, select the asset checkbox, then delete

**NO.25** Which backup storage systems are supported when a CR Vault solution needs to be implemented?

- \* Production: Any storage Vault: Isilon or ECS
- \* Production: PowerProtect DD Vault: PowerProtect DD
- \* Production: Any disk storage Vault: Tape solution
- \* Production: Isilon Vault: Any storage

**NO.26** A customer wants to use the service of an external network operation center (NOC) / security operation center (SOC) to monitor the CR Vault environment.

What is the most secure solution if the customer wants to ensure that communication is only possible to the NOC/SOC?

- \* Firewall
- \* Dedicated Network Link
- \* Data Diode
- \* VPN Tunnel

**NO.27** Which are valid components of a Cyber Recovery policy?

- \* Objects like PowerProtect DD and Backup software applications. Jobs such as synchronization, copy, and lock
- \* Objects like PowerStore and Backup software applications. Jobs such as synchronization, copy, and lock
- \* Objects like PowerProtect DD and Backup software applications. Jobs such as backup, restore, and cleaning
- \* Objects like PowerProtect DD and Backup software applications. Jobs such as synchronization, copy, and governance

**NO.28** What is the purpose of Denial of Service attacks?

- \* launch the attack from many other host machines
- \* bring down a system to initiate another attack
- \* encrypt the data for ransom
- \* affect the system by a business competitor

**NO.29** How much swap space is required for a host running CyberSense with 128 GB of memory?

- \* 320 GB
- \* 448 GB
- \* 832 GB
- \* 576 GB

**NO.30** Where is the CyberSense feature installed in a Cyber Recovery environment?

- \* In the same host as the Cyber Recovery software.
- \* In a dedicated Red Hat Enterprise Linux host in the vault.
- \* In a shared CentOS host in the vault.
- \* In a dedicated CentOS host in the production side.

**NO.31** What are the possible connection states of the CR Vault?

- \* Acked, Unlocked, Unknown, Secured, and Downgraded
- \* Open, Locked, Secured, Promoted, and Unknown
- \* Degraded, Down, Up, Running, and Maintenance
- \* Locked, Unlocked, Unknown, Secured, and Degraded

**NO.32** Which Cyber Recovery component is used to detect, diagnose, and accelerate recovery within the Vault?

- \* Secure Data Isolation
- \* Cyber Recovery Vault
- \* CyberSense
- \* Sandbox

**NO.33** What parameter is added to the command crsetup.sh to install Cyber Recovery on a VM?

- \* start
- \* run
- \* deploy
- \* install

**NO.34** What occurs when the CyberSense license expires?

- \* CR software will completely stop

- \* CR software will stop creating the PIT
- \* Analyze operation will continue with a warning
- \* Analyze operation fails

**NO.35** Which Cyber Recovery REST API section allows a user to create log bundles?

- \* Notifications
- \* Actions
- \* Systems
- \* Authentication

**NO.36** For which two default user accounts does a Cyber Recovery virtual appliance deployment require an administrator to reset a password?

- \* cyber-security-admin and crso
- \* root and admin
- \* admin and cyber-security-admin
- \* crso and root

**NO.37** What is the minimum number of Ethernet interfaces needed for Cyber Recovery?

- \* 4
- \* 3
- \* 1
- \* 2

**NO.38** When is the lockbox passphrase required after the installation?

- \* To reset the security officer's password and the root user password
- \* To perform upgrades and recoveries from the vault
- \* To perform recoveries from the vault and reset the root user password
- \* To perform upgrades and reset the security officer's password

**NO.39** What is the result of running the `ierestart -r` command?

- \* the CyberSense vApp is restarted
- \* the CyberSense software is unpacked
- \* the docker containers are removed and created
- \* the docker image is successfully loaded

**DEP-3CR1 Exam Practice Materials Collection:** <https://www.actualtests4sure.com/DEP-3CR1-test-questions.html>